

Benefits & Features

- Flexibility:** Five-colour selectable and multi-directional adjustable heads for versatile lighting options
- Easy Installation:** Quick connector and positioning plate for fast and accurate setup
- Durability:** Die-cast aluminium body for longevity
- Efficiency:** High-efficiency COB LEDs for superior brightness and low power consumption
- Convenience:** Integrated driver for compact design and stable performance





Installation Options

- Integrated Passive Infrared (PIR) sensor option available



Applications

- Commercial & Residential:** Driveways, pathways, gardens, etc.

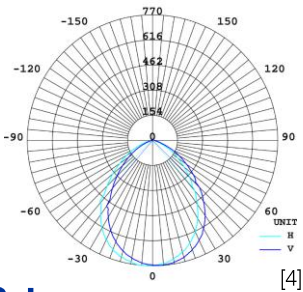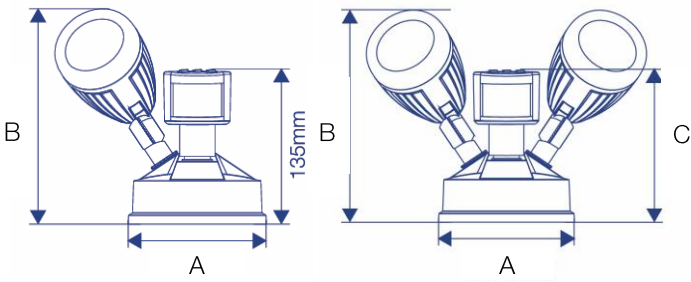

Product Data

Order Code	Wattage	Colour Temperature	Lumen Output	Fitting Colour	Dimensions AxB (xC)	Weights
201004	15W	3000K/4000K/5000K/5700K/6500K	1500Lm	Black	120x188mm	0.6kg
201004S	15W	3000K/4000K/5000K/5700K/6500K	1500Lm	Black	120x188(x135)mm	0.72kg
201005	2x15W	3000K/4000K/5000K/5700K/6500K	3000Lm	Black	120x188mm	0.85kg
201005S	2x15W	3000K/4000K/5000K/5700K/6500K	3000Lm	Black	120x188(x135)mm	0.97kg
201006	15W	3000K/4000K/5000K/5700K/6500K	1500Lm	White	120x188mm	0.6kg
201006S	15W	3000K/4000K/5000K/5700K/6500K	1500Lm	White	120x188(x135)mm	0.72kg
201007	2x15W	3000K/4000K/5000K/5700K/6500K	3000Lm	White	120x188mm	0.85kg
201007S	2x15W	3000K/4000K/5000K/5700K/6500K	3000Lm	White	120x188(x135)mm	0.97kg

[1] Voltage: 220-240V~50Hz [2] Power Factor: 0.9 [3] Beam Angle: 90° [4] The graph illustrates the distribution at 30W with a CCT of 5000K.